
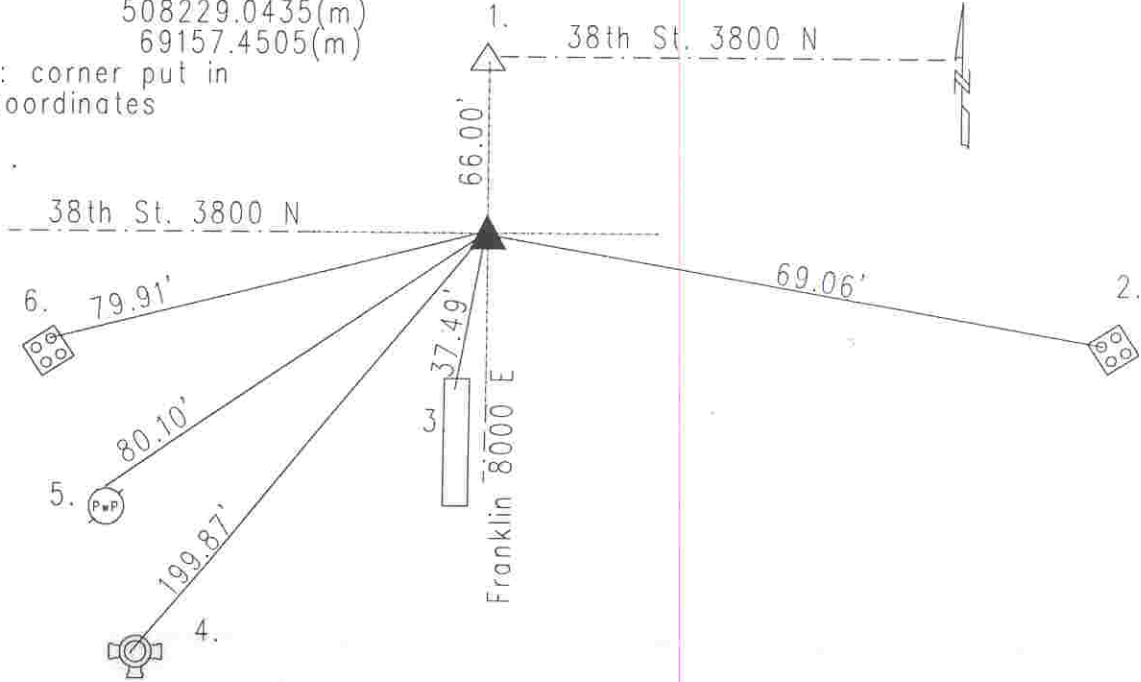


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 24 TOWNSHIP 16 RANGE 4
DATE: ~~12-18-04~~ 9-25-06
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 10-23-97

IN. S.P.C. E ZONE NAD '83
NAME: 16042403
N: 508229.0435(m)
E: 69157.4505(m)
NOTE: corner put in
per coordinates

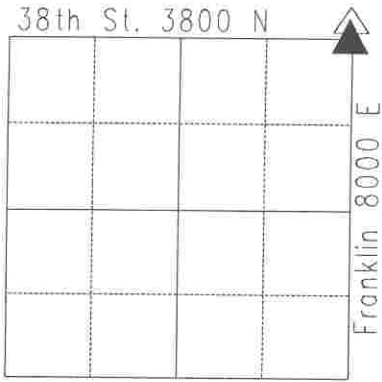

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 14" Beech bearing south 4 degrees, thence east 29 links ; and a 15" bur oak bearing north 21 degrees, thence west 20 links. (M.c. atlas p. 11) A survey by Percy Hasbrook on July 21, 1849 indicates a found rock and the stumps at both witness trees. (Warren Legal Book p. 3) Corner referenced by Monroe on 7/24/52 and called a stone. Corner referenced by GWS on 9/30/63 and called a stone. Corner referenced by Burres on 2/6/64 and called a stone. Corner referenced by Se Franka on 9/10/69 and called a iron pin. Corner referenced by Se Franka on 5/22/72 and called a iron pin. Corner referenced by Fortner on 4/22/75 and called a re- inforcing rod. Corner referenced by Whiteside on 10/23/97 and called a brass plug. Corner excavated by Wilcoxon on 12/12/01 and a #205 cast iron Harrison Monument was set in position by GPS coordinates.

16042403

REF.	DISTANCE	DESCRIPTION
1.	66.00'	Due N to NW corner of 19-16-5
2.	69.06'	Cut 'x' E-bolt of aluminum pole base
3.	37.49'	Cut 'x' in N-end of concrete median
4.	199.87'	Top nut of fire hydrant
5.	80.10'	Nail N PwP#282-419 B 6"up
6.	79.91'	Cut 'x' N-bolt of aluminum pole base